

Industrial ironers

IC64821, IC64825, IC64832


4 stars Ergonomic Certification

Certified ergonomics

Reducing workload, easing stress, intuitive and user friendly


Outstanding productivity


Brilliant results with optimised staffing costs maintaining strict standards of hygiene


Full flexibility

Multiple solutions designed for your specific needs


Tried & tested durability

Guaranteeing consistent results without interruption

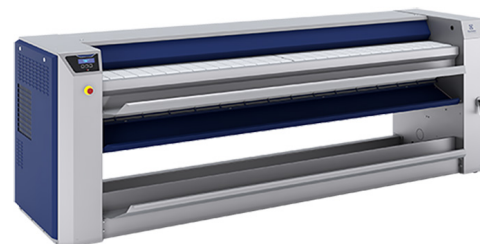
Images shown are a representation of the product only and variations may occur.

OPTIONS & AREA CONCERNED BY THE OPTIONS		Active	Performance	Superior
Basic Model - Electric and Gas heated				
Manual Feeding:				
Feed Alone + Vacuum Table	Stop the feeding table (while you are still ironing) to feed alone large item	No	No	Yes
Vacuum Table	To optimise the feeding and by consequence the ironing quality	No	Yes	No
Folding:				
Antistatic Bar	To avoid polyester to stick on the cylinder	No	No	No
Productivity:				
Feed Now	To inform operator when and which area the ironer cylinder is ready to iron	Yes	No	No
Dubixium	Keep the cylinder temperature always uniform and optimise the productivity	No	Yes	Yes
DIAMMS	Operates automatically at optimum speed whilst perfectly managing the moisture in your laundry	No	No	No

OPTIONS & AREA CONCERNED BY THE OPTIONS		Active	Performance	Superior
Basic Model - Steam heated				
Manual Feeding:				
Feed Alone + Vacuum Table	Stop the feeding table (while you are still ironing) to feed alone large item	No	No	Yes
Vacuum Table	To optimise the feeding and by consequence the ironing quality	No	Yes	No
Folding:				
Antistatic Bar	To avoid polyester to stick on the cylinder	No	No	No
Productivity:				
DIAMMS	Operates automatically at optimum speed whilst perfectly managing the moisture in your laundry	No	No	No

Main specifications		IC64821	IC64825	IC64832
Capacity, max. water evaporation, el / steam / gas ¹	l/h	40 / 63 / 37	48 / 75 / 46	59 / 93 / 59
Cylinder, diameter, el & gas / steam	ø mm	479 / 457	479 / 457	479 / 457
Cylinder, length	mm	2120	2540	3170
Ironing speed	m/min	1.5-9	1.5-9	1.5-9
Heating, electricity	kW	37	44	54
Heating, steam (900 kPa)	kg/h	92	110	141
Heating, gas	Btu/h (kW)	150100 (44)	177400 (52)	221800 (65)

¹. 50% residual moisture content cotton 180g/m² and 100% cylinder use (ISO 9398-1).


Electrical connections ¹		IC64821	IC64825	IC64832
Electric heated:				
400-415V 3AC 50/60 Hz	kW(A)	38 (63)	45 (80)	56 (100)
Gas heated:				
208-240V 3AC 60 Hz	kW(A)	2 (16)	2 (16)	2 (16)
Steam heated:				
400V 3 AC 50/60 Hz	kW(A)	2 (16)	2 (16)	2 (16)

1. Other voltages available, see installation manual.

Steam, gas and air connections		IC64821	IC64825	IC64832
Steam	DN	20	20	20
Rec. steam pressure	kPa	900	900	900
Condensate	DN	10	10	10
Gas	DN	20	20	20
Gas pressure, natural gas (G20/G25)	Pa	2000 / 2500	2000 / 2500	2000 / 2500
Gas pressure, propane (G31)	Pa	3700 / 5000	3700 / 5000	3700 / 5000
Air outlet	ø mm	150	150	150
Evacuated air, gas	m ³ /h	830	950	1010
Evacuated air, el, steam	m ³ /h	740	880	960
Pressure drop	max. Pa	200	200	200
Sound levels				
Airborne sound level	dB(A)	73	73	73
Heat emission				
% of installed power, max		3	3	3
Shipping data ¹				
Weight	net, kg	950	1120	1295
Shipping volume	m ³	5.63	6.43	7.64

1. Average data. Crated weight/shipping volume depends on configuration. Please contact logistics for exact measures.

Dimensions in mm		IC64821	IC64825	IC64832
A Overall width		2785	3205	3835
B Ironing width		2120	2540	3170
1. Control panel				
2. Exhaust connection				
3. Steam connection				
4. Condensate connection				
5. Electrical connection				
6. Gas connection				

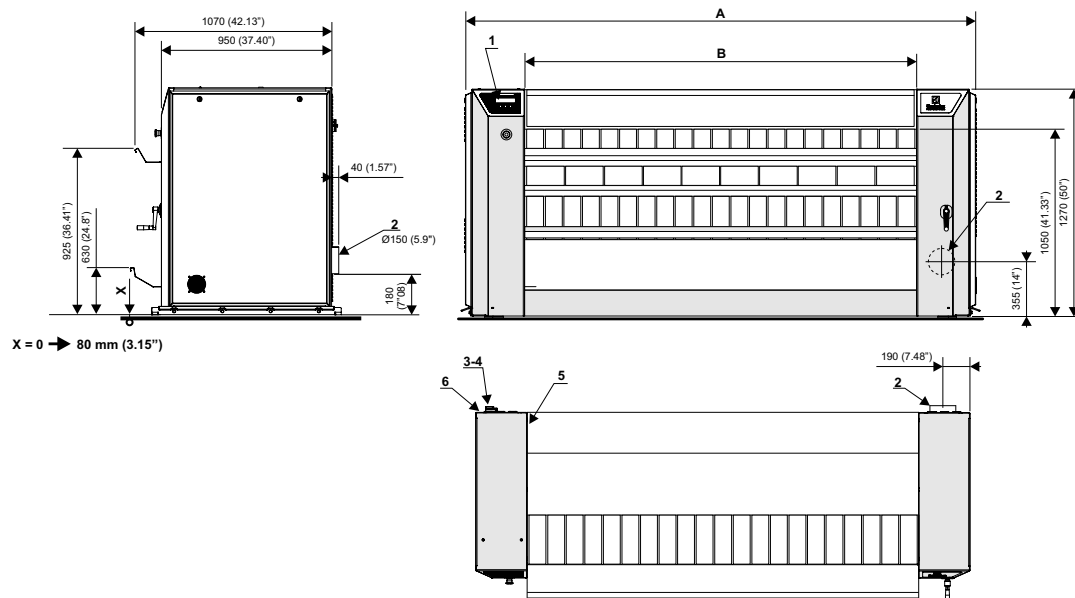

Experience the Excellence
www.electroluxprofessional.com

438900481EN/2025.10.29

We reserve the right to alter specifications without notice



P 1300 885 287
E sales@laundryinnovations.com.au
W laundryinnovations.com.au

