

# Drying cabinet

## DC6-14 with heat pump

Drying Cabinets have no mechanical action and are used to efficiently dry bulky items such as workwear/overalls/gloves and boots or delicate items such as silk and linen



### Priority on people

Ergonomic design, with user friendly positioning of door handle, control panel and suitable for disabled users

- Easy operation with 2 automatic drying programs, which will stop once the load is dry
- Braille script
- Large doors and opening angles for easy access
- One extensible hanger for easy loading/unloading
- Hanging ability in the short end for smaller garments
- Flexible installation with adjustable feet



### Long-term savings

By using a Drying Cabinet with a Heat Pump, not only can you avoid exhaust connection you can reach energy saving of 70% compared with an electric vented version. There are two options of heat pump version, one with water tank and one without



### Outstanding productivity

Time saving when used instead of flat or hang drying. The door can be opened a short moment without stopping the drying process

### Safety

Option to activate child safety start lock



*Images shown are a representation of the product only and variations may occur.*

| Main specifications <sup>1</sup> |        | DC6-14 |
|----------------------------------|--------|--------|
| Rated capacity                   | kg     | 10     |
| Evaporation                      | g/min  | 80     |
| Drying time                      | min    | 69     |
| Energy consumption               | kWh    | 2.6    |
| Energy per load                  | kWh/kg | 0.22   |
| Energy/water evaporated          | kWh/l  | 0.40   |

1. Mixed cotton load centrifuged to 55% residual moisture.



| Electrical connections  |              |    |                  |                |                                     |
|-------------------------|--------------|----|------------------|----------------|-------------------------------------|
| Heating alternative     | Main voltage | Hz | Heating power kW | Total power kW | Recommended fuse A                  |
| Machines with heat pump | 400V 3N-     | 50 | <sup>1</sup>     | 3.2            | 10A slow-blow<br>10A automatic fuse |

1. Total power and recommended fuse does not depend on the heating power in those cases.

| Sound levels                                                                        |                                     | DC6-14 |
|-------------------------------------------------------------------------------------|-------------------------------------|--------|
| Sound power/pressure level at drying <sup>1</sup>                                   | dB(A)                               | <70    |
| Heat emission                                                                       |                                     |        |
| Average heat emission per drying cycle used to assess ventilation need <sup>2</sup> | kW                                  | 1.2    |
| Weight <sup>3</sup>                                                                 |                                     |        |
|                                                                                     | net, kg                             | 250    |
| 1. Operating panel                                                                  | 3. Drain for condense water ø 32 mm |        |
| 2. Electrical connection                                                            |                                     |        |

1. Sound power levels measured according to ISO 60704.  
2. For assistance with dimensioning necessary ventilation needs, contact authorized ventilation technician. For sufficient ventilation all sources introducing heat need to be taken into account plus all other parameters effecting the ventilation need. Climate zone, building parameters, room size, etc.  
3. Applies to assembled drying cabinets.

Colour of front and side panels is silver grey and handle is dark blue.

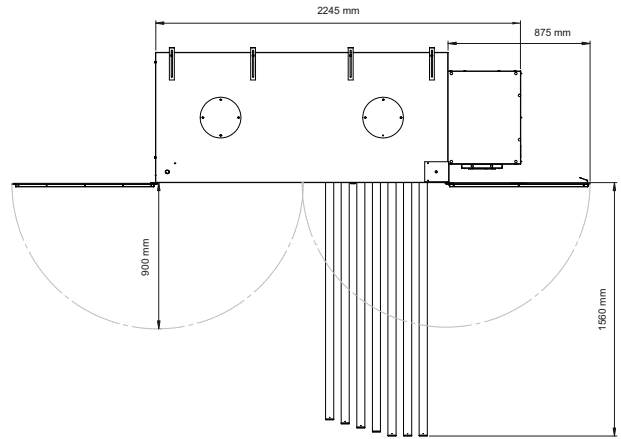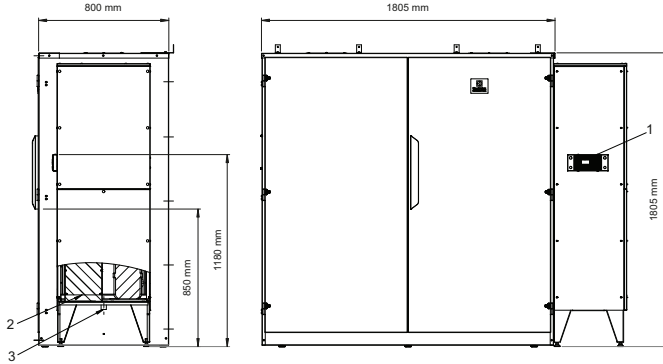

438900498EN/2025.03.19  
We reserve the right to alter specifications without notice



P 1300 885 287  
E sales@laundryinnovations.com.au  
W laundryinnovations.com.au

