

Industrial Ironers

IV64821FFS, IV64825FFS, IV64832FFS



4 stars Ergonomic Certification



Certified ergonomics

Reducing workload, easing stress, intuitive and user friendly



Optimum productivity

Brilliant results with optimised staffing costs maintaining strict standards of hygiene




Full flexibility

Multiple solutions designed for your specific needs



Tried & tested durability

Guaranteeing consistent results without interruption

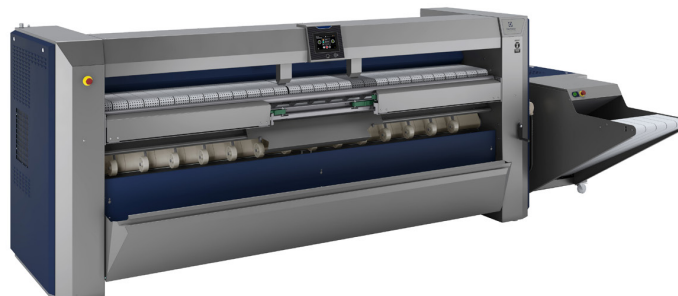

Images shown are a representation of the product only and variations may occur.

OPTIONS & AREA CONCERNED BY THE OPTIONS FFS Model - Electric and Gas heated		Superior
Manual Feeding:		
Vacuum Table	To optimise the feeding and by consequence the ironing quality	Yes
Folding:		
Antistatic Bar	To avoid polyester to stick on the cylinder	Yes
Productivity:		
Dubixium	Keep the cylinder temperature always uniform and optimise the productivity	Yes
DIAMMS	Operates automatically at optimum speed whilst perfectly managing the moisture in your laundry	Yes

OPTIONS & AREA CONCERNED BY THE OPTIONS FFS Model - Steam heated		Superior
Manual Feeding:		
Vacuum Table	To optimise the feeding and by consequence the ironing quality	Yes
Folding:		
Antistatic Bar	To avoid polyester to stick on the cylinder	Yes
Productivity:		
DIAMMS	Operates automatically at optimum speed whilst perfectly managing the moisture in your laundry	Yes


- The delivery of the linen stacked can be done front or rear (to be define at the order or can be change on site)
- Option: air compressor integrated (valid only for IV64832FFS and IV64825FF)

Main specifications		IV64821FFS	IV64825FFS	IV64832FFS
Capacity*, max. water evaporation**	l/h	40/63/37	48/75/46	59/93/59
Cylinder diameter (electricity, gas/steam)	mm	479/457	479/457	479/457
Ironing width	mm	2120	2540	3170
Ironing speed	m/min	1.5-9	1.5-11	1.5-11
Heating, electricity	kW	37	44	54
steam (900 kPa)	kg/h	92	110	141
gas	Btu/h (kW)	150100 (44)	177400 (52)	221800 (65)
* 50% residual moisture content cotton 180g/m ² and 100% roller utilization (ISO 9398-1).				
** El/steam/gas.				

Electrical connections*		IV64821FFS	IV64825FFS	IV64832FFS
Heating alternative				
Electric heated	400V-415V 3AC 50/60 Hz kW(A)	38 (63)	45 (80)	56 (100)
Gas heated /	400V-415V 3AC 50/60 Hz kW(A)	2 (16)	2 (16)	2 (16)
	208-240V 3AC 60Hz kW(A)	2 (16)	2 (16)	2 (16)
Steam heated	400V-415V 3AC 50/60 Hz kW(A)	2 (16)	2 (16)	2 (16)
Steam, gas and air connections				
Steam	DN	20	20	20
Rec. steam pressure	kPa	900	900	900
Condensate	DN	10	10	10
Gas	DN	20	20	20
Gas pressure,				
natural gas (G20/G25)	Pa	2000/2500	2000/2500	2000/2500
propane (G31)	Pa	3700/5000	3700/5000	3700/5000
Air outlet	ø mm	150	150	150
Evacuated air,				
gas	m³/h	800	950	1010
el, steam	m³/h	740	880	960
Pressure drop	max. Pa	200	200	200
Air inlet	ø mm	6/8	6/8	6/8
Air pressure, min-max	bar	5.5-7	5.5-7	5.5-7
Consumption	l/h	280	280	280
Sound levels				
Airborne sound level	dB(A)	73	73	73
Heat emission				
% of installed power, max.		3	3	3
Shipping data** (delivered in 2 boxes with crate)				
1. Ironer (Electrical heated / Gas heated / Steam heated)	net, kg	1560 / 1560 / 1640	1630 / 1630 / 1733	1815 / 1815 / 1920
2. Shipping volume (pallet / crate)	m³	6.70 / 7.34	7.49 / 8.35	8.93 / 9.93
Dimensions in mm				
A Overall width		3780	4185	4815
B Ironer width		2800	3205	3835
1 Control panel		5 Electrical connection		
2 Exhaust connection		6 Gas connection		
3 Steam connection		7 Air compressed connection		
4 Condensate connection				

* Other voltages available, see installation manual.

** Average data. Crated weight/shipping volume depends on configuration. Please contact logistics for exact measures.

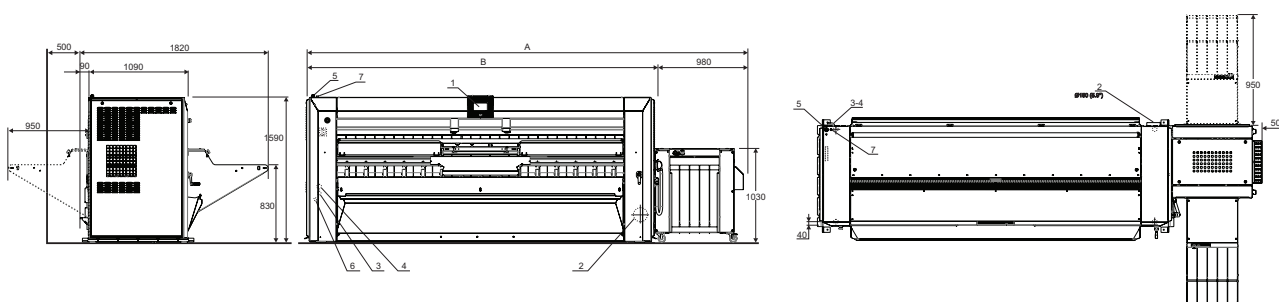

Art. No. 438918243EN/2025.03.03
 We reserve the right to alter specifications without notice.



Experience the Excellence
www.electroluxprofessional.com

P 1300 885 287
 E sales@laundryinnovations.com.au
 W laundryinnovations.com.au