

Professional Washer

PW9C

Features and benefits

- **Compass Pro® microprocessor offers:**
 - Large display and one control knob for easy program selection
 - Language selection
- PW9C is a large capacity washer suitable for professional users
- Four compartment detergent box for manual dosing of powder or liquid detergent
- Door with gasket and strong hinges built for heavy duty operation
- Stainless and galvanized steel in all vital parts for high degree of rust protection
- Large door opening for easy loading/unloading
- Drain pump
- Electrical connection: 3 phase or 1 phase
- Water hoses included

Options

- Coin meter
- Drain valve



Images shown are a representation of the product only and variations may occur.




Main specifications		PW9C	
Capacity, max.	kg/lb	9/20	
Extraction	rpm	1015	
G-factor		300	
Heating alternatives	electricity 3 AC	5.4	
	electricity 1 AC	3.6	
	non-heated	x	
Consumption data "Colour 60°C" without Pre-wash*		5.4 kW	3.6 kW
Total time	min	50	54
Water consumption (cold/hot)	litre	89/17	89/17
Energy consumption (motor/heating)	kWh	0.25/0.65	0.25/0.65

* Water temperature 15°C cold water and 65°C hot water

Produced according to ISO 9001 and ISO 14001.

Certified with CB certificate for Low Voltage Directive and S-mark according to the Machinery Directive. Protection class IP X4D.


Electrical connections					
Heating alternative	Main voltage	Hz	Heating power kW	Total power kW	Recommended fuse A
Electric heated	220-240V 1 ~	50/60	5.4/7.5	5.5/7.6	25/35
	220-240V 1 ~	50/60	2.0/3.0	2.1/3.1	10/16
	220-240V 3 ~	50/60	5.4/7.5	5.5/7.6	16/20
	220-240V 3 ~	50/60	3.0/4.3	3.1/4.5	10/16
	380-415V 3N ~	50/60	5.4/7.5	5.5/7.6	10/16
	380-415V 3N ~	50/60	3.0/4.3	3.1/4.5	10
	440V 3 ~	60	7.5	7.6	16
	480V 3 ~	60	7.5	7.6	10
Steam or Non heated	220-480V 1 ~	50/60	-	1.0	10

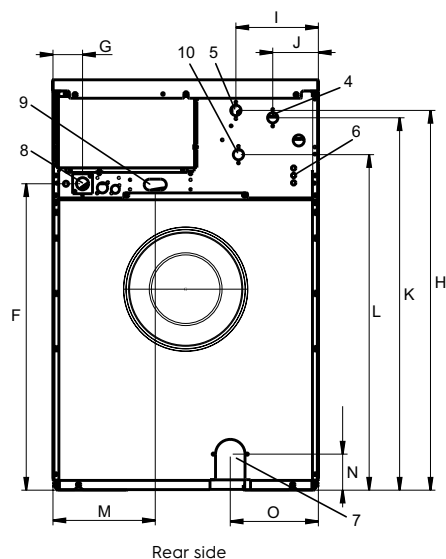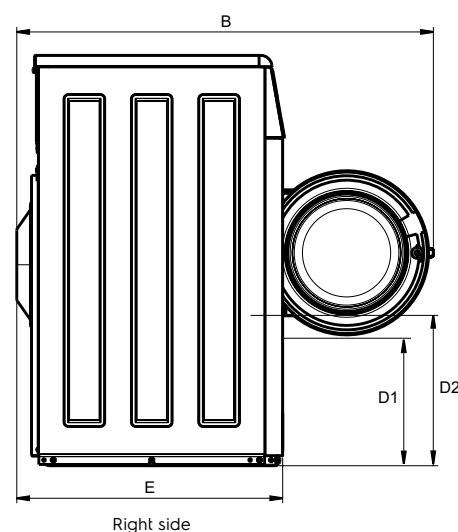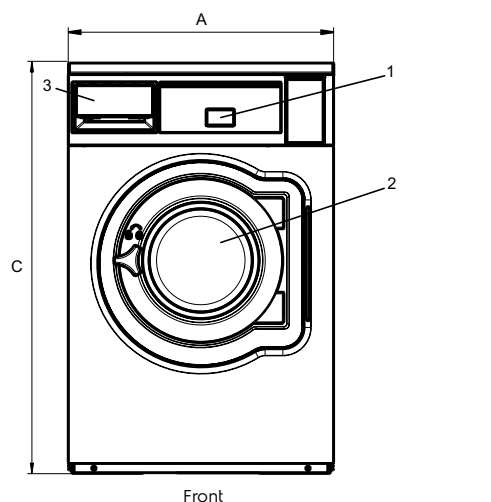

Water and steam connection		PW9C
Water valves	DN	20
Water pressure	kPa	150-400
Capacity at 300 kPa	l/min	16
Drain valve (optional)	Ø mm	50/75
Draining capacity	(pump) l/min	30
	(drain valve) l/min	160
Liquid detergent supplies (optional)		3
Floor requirements		
Frequency of the dynamic force	Hz	16.9
Floor load at max extraction	kN	1.4 ± 0.5
Sound levels		
Sound power/pressure level at extraction*	dB(A)	75/61
Sound power/pressure level at wash*	dB(A)	60/46
Heat emission		
% of installed power, max		5
Shipping data*		
Weight	net, kg	135
Shipping volume	m ³	0.81
Dimensions in mm		
A Width		720
B Depth		1130
C Height		1113
D1		352
D2		406
E		721
F		831
G		80
H		1030
I		224
J		124
K		1010
L		910
M		278
N		98
O		239
1 Operating panel	6 Liquid detergent supply	
2 Door opening Ø 310 mm	7 Drain valve	
3 Detergent box	8 Electrical connection	
4 Cold water	9 Steam connection	
5 Hot water	10 Re-used water	

* A-weighted emission sound pressure level at workstations.

** Average data. Crated weight/shipping volume depends on configuration. Please contact logistics for exact measures.

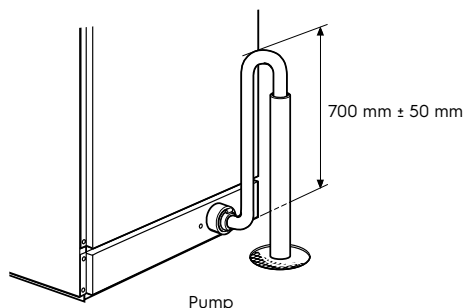

Experience the Excellence
www.electroluxprofessional.com

Art No. 438919529EN/2020.12.11
We reserve the right to alter specifications without notice.