

Bed type Ironer

IB62310, IB62314, IB62316

Features and benefits

- Return feed system
- Finger guard protection provides additional safety for operator
- Adjustable temperature
- Cylinder covered with steel wool and cotton felt for a long life time and a good drive of the linen
- Ergonomic control pedal
 - engage the iron against the cylinder
 - disengage the iron against the cylinder
 - stop the cylinder motion to improve a fabrics pleat
- Feeding table and reception tray made of steel

Other options

- Variable speed control
- Superior package
 - Nomex padding on cylinder for longer life time
 - metallic stripper to avoid linen to stick on the cylinder



Images shown are a representation of the product only and variations may occur.

Main specifications		IB62310	IB62314	IB62316
Capacity, max. water evaporation ¹	l/h	5.0	6.8	8.1
Cylinder, diameter	ø mm	230	230	230
Cylinder, length	mm	1000	1400	1650
Ironing speed	m/min	3.4	3.4	3.4
Ironing speed with variable speed control option	m/min	1-4	1-4	1-4
Heating, electricity	kW	5.0	7.2	8.4

¹. 20% residual moisture content and 100% roller utilization (ISO 9398).



Electrical connections ¹	IB62310	IB62314	IB62316
Without speed control:			
440V / 3 AC / 60 Hz	5.2 (10)	7.5 (16)	8.7 (16)
400V / 3N AC / 50-60 Hz	5.2 (10)	7.5 (16)	8.7 (16)
400V / 3 AC / 50-60 Hz	5.2 (10)	7.5 (16)	8.7 (16)
230V / 3 AC / 50 Hz	5.2 (16)	7.5 (20)	-
208V / 3 AC / 60 Hz	5.2 (16)	7.5 (20)	-
230V / 1 AC / 50-60 Hz	5.2 (32)	7.5 (32)	-
With speed control:			
440V / 3 AC / 60 Hz	-	-	-
400V / 3N AC / 50-60 Hz	5.2 (10)	7.5 (16)	8.7 (16)
400V / 3 AC / 50-60 Hz	-	-	-
230V / 3 AC / 50 Hz	5.2 (16)	7.5 (20)	8.7 (32)
208V / 3 AC / 60 Hz	5.2 (16)	7.5 (20)	8.7 (32)
230V / 1 AC / 50-60 Hz	5.2 (32)	7.5 (32)	-

1. Other voltages available, see installation manual.

Connections	IB62310	IB62314	IB62316
Exhaust, outlet ø mm	-	40	40
Sound levels			
Airborne sound level dB(A)	52	54	54
Heat emission			
% of installed power, max	3	3	3
Shipping data¹			
Weight net, kg	120	140	184
Shipping volume m ³	0.91	1.16	1.34

1. Average data. Crated weight/shipping volume depends on configuration. Please contact logistics for exact measures.

Dimensions in mm	IB62310	IB62314	IB62316
A	1395	1795	2045
B	510	510	510
C	1025	1025	1025
D	1055	1455	1705
E	940	940	940
F	420	420	420
1. Electrical connection			
2. Bed release lever			
3. Control panel			
4. Control pedal			

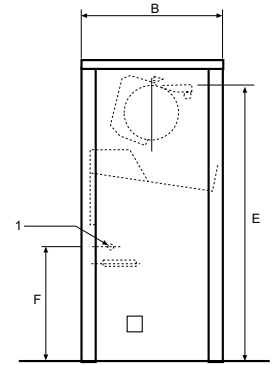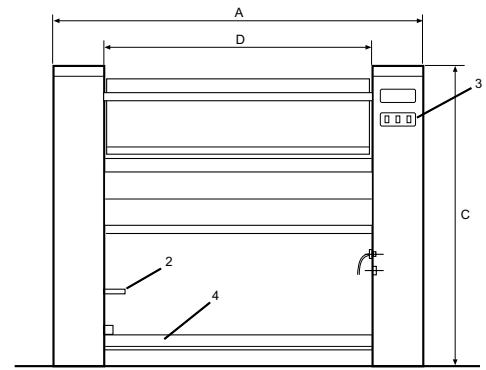

Experience the Excellence
www.electroluxprofessional.com

438918187EN/2024.10.29
We reserve the right to alter specifications without notice



P 1300 885 287
E sales@laundryinnovations.com.au
W laundryinnovations.com.au

